Micro-Lynx

MICRO-LYNX 830 GX53 6W SLV

0035902

Range features

CE

PRODUCT OVERVIEW

Ordering number	0035902
Technology	Compact Fluorescent
Light colour	830 Warm White
Energy class	A
Average life (Rated) (h)	2000
Lamp shape	Disc
Lamp finish	Clear
Dimmable	No
Cap/Base	GX53
Type	GX53
EAN code	5410288359021
CRI (Ra)	80
Colour temperature (K)	3000
Luminous flux (Rated) (lm)	235
Efficacy (Rated) (lm/w)	39
Watt (Nominal) (W)	6
Voltage (V)	220-240

Micro-Lynx

MICRO-LYNX 830 GX53 6W SLV

0035902

DATA TABLE

General data

Ordering number	0035902
Dry applications use only	Yes
Technology	Compact Fluorescent
Energy saving lamp	Yes
Energy class	A
Average life (Rated) (h)	2000
Average life (Nominal) (h)	10000
Lamp finish	Clear
Lamp shape	Disc
Dimmable	No
Cap/Base	GX53
Type	GX53
EAN code	5410288359021
E-number SE	8357590
E-number FI	4940418
Long description	
Product name	MICRO-LYNX 830 GX53 6W SLV
Lamp mercury content (mg)	< 2,5 mg
Starting time (max) (s)	0,9-1,5 s
Warm-up time to 60% of full light (max) (s)	4 s
Control gear required	NO
Intended purpose	General lighting
No. of switching cycles before premature failure (min)	10000
Transformer required	No
Sales pack quantity	20

Optical data

Light colour	830 Warm White
CRI (Ra)	80
Colour temperature (K)	3000
Luminous flux (Rated) (lm)	235
Lumen maintenance at end of nominal life (%)	85
Luminous flux (Nominal) (lm)	235

Micro-Lynx

MICRO-LYNX 830 GX53 6W SLV

0035902

Electrical data

kWh per 1000 hours burning time	6
Efficacy (Rated) (lm/w)	39
Watt (Rated) (W)	6
Watt (Nominal) (W)	6
Voltage (V)	220-240
Lamp power factor	0.6

Physical data

Weight (kg)	0.05
Lamp Length (mm) - C/L	15,2 mm
Max. Lamp Diameter (mm) - D	75,2 max.
Single packaging type	Box/Sleeve
Single package dimensions (L x W x H) (cm)	8.10 x 8.10 x 2.70
Outer package dimensions (L x W x H) (cm)	28.00 x 19.50 x 9.20

Micro-Lynx

MICRO-LYNX 830 GX53 6W SLV

0035902

TECHNICAL DRAWINGS

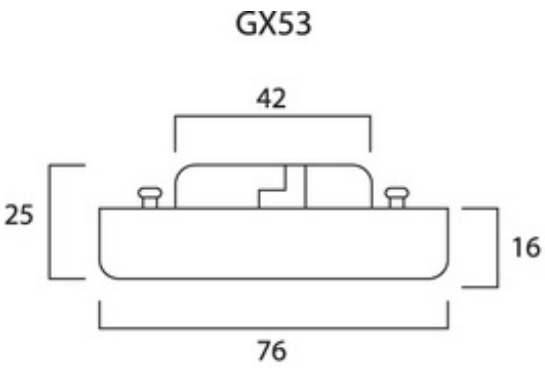

ENERGY LABEL